

GENERATING SET GE 10 YSX

The images are for reference



FEATURES

- Combined system voltage regulation: electronic AVR + Compound
- The rounded edges of the canopy designed for rainwater drainage away
- Bunded base suitable to contain any liquids leakage from engine avoiding environmental pollution
- External caps for oil and water drain
- Large doors for better and easy maintenance (air, oil, fuel filters replacement)
- Central lifting eye
- Forklift pockets
- Ready for connection to automatic transfer unit EAS (AMF + ATS)
- Meets EC directives for noise and safety



water
cooled



diesel



three-phase
power



electric



super
silenced

POWER RATINGS

* Stand-By three-phase power	9.5 kVA (7.6 kW) / 400V / 13.7 A
* PRP three-phase power	9 kVA (7.2 kW) / 400V / 13 A
* PRP single-phase power	4.5 kVA / 230V / 19.5A
* COP single-phase power	/
Frequency	50 Hz
Cos φ	0.8

* Output powers according to ISO 8528-1

DEFINITION

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level

LTP power: stand-by power: Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

PRP power: continue power with variable loads. Maximum power for use with variable loads for a yearly illimited nubers of hours.

COP power: continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

ENGINE 1500 RPM

4 STROKE, INDIRECT INJECTION, NATURAL ASPIRATED

Model	YANMAR 3TNV80
* Stand-By net power	9 kW (12.2 hp)
* PRP net power	8.2 kW (11.1 hp)
* COP net power	/
Cylinders / Displacement	3/ 1.2 lit
Bore / Stroke	80 / 84 (mm)
Compression ratio	23 : 1
BMEP (Brake Mean Effective Pressure : LTP - PRP)	/
Speed governor type	Mechanical
FUEL CONSUMPTION	
110 % (Stand-by power)	2.7 lit./h
100 % to PRP	2.5 lit./h
75 % to PRP	2 lit./h
50 % to PRP	1.6 lit./h
COOLING SYSTEM	
Total system cap. - only engine	/ lit. - 0.9 lit.
Fan air flow	32 m³/min.
LUBRICATION SYSTEM	
Total oil system capacity	/
Oil capacity in sump	1.6 lit. (min) – 3.4 lit. (max)
Oil consumption at full load	/

* Output powers according to ISO 3046-1

EXHAUST SYSTEM	
Maximum exhaust gas flow	/
Max. exhaust gas temp.	390 °C
Maximum back pressure	9.8 kPa (0.1 bar)
External diameter exhaust pipe	/
ELECTRICAL SYSTEM	
Starter motor power	1.1 kW
Battery charging alternator cap.	40 A
Cold start	Cold start aid - 15 °C
With cold start aid	/
AIR FILTER	
Combustion air flow	0.75 m³/min
HEAT REJECTED AT FULL LOAD	
To exhaust system	/
To water and oil	/
Radiated to room	/
To charge cooler	/

ALTERNATOR

SYNCHRONOUS, THREE-PHASE, SELF-EXCITED, SELF-REGULATED, BRUSHLESS	
Continuous power	10 kVA
Stand-by power	11 kVA
Three phase voltage	380-415 Vac
Frequency	50 Hz
Cos φ	0.8
Model A.V.R.	HVR-10 KE
Voltage regulation acc.	± 1.0 %
Sustained short circuit current	3 In
Transient dip (100% load)	17 %
Recovery time	/
Efficiency at 100% load	84.4 % (400V - Cos φ 0,8)
Insulation	Class H
Connection - Terminals	Star - N°6
Electromagnetic compatibility (R.F.I. suppr.)	/
Waveform distortion - THD	< 4 %
Telephone interference - THF	/

REACTANCES (10 kVA - 400V)	
Direct axis synchronous - Xd	220 %
Direct axis transient - X'd	18 %
Subdirect axis transient - X''d	7.6 %
Quadrature axis synchronous - Xq	119 %
Quadr. axis subtransient - X''q	/
Negative sequence - X2	/
Zero sequence - X0	/
TIME CONSTANTS	
Transient - T'd	0.027 sec
Subtransient - T''d	0.005 sec
Open circuit - T'do	0.335 sec
Armature - Ta	/
Short-circuit ratio Kcc	0.81
Cooling air flow	0.068 m³/sec.
Coupling Bearing	Direct SAE 5 - 7 ½ - N°1

GENERAL SPECIFICATIONS

Fuel tank capacity	55 lt.
Running time (75% to PRP)	27.5 h
Starter battery	12 Vdc -62Ah
IP protection degree	IP 44

* Measured acoustic power LwA (pressure LpA)	83 dB(A) (58 dB(A) @ 7m)
* Guaranteed acoustic power LwA (pressure LpA)	84 dB(A) (59 dB(A) @ 7m)
Performance class (ISO 8528)	G2

* Acoustic power according to European Directive 2000/14/CE

CONTROL PANEL

- Controller EP6
- Fuel level gauge
- Siren
- Emergency stop button
- Local-Remote Start switch
- EAS plug
- TCM 35 remote control plug
- Voltmeter switch 0 - RS - ST - TR
- Circuit breaker
- ELCB-GFI (Ground Fault Interruptor)
- Output sockets: 1x400V 16A 3P+N+T | CEE - 2x230V 16A 2P+T CEE
1x400V 16A 3P+N+T | CEE - 2x230V 16A 2P+T SCHUKO
- Earth terminal (PE)

EP6 CONTROLLER CHARACTERISTICS	
Operating mode	OFF - MAN. - AUTO
Display	4-digits display
LEDs	Engine is running AUTO mode
Buttons/controls	Starter key AUTO button N° 5 buttons for controller programming
Measures	Generator voltage Generator current Frequency Engine speed Battery voltage Charger battery voltage Hoursmeter
Alarms	Low oil pressure High temperature Belt break Low level fuel Emergency stop button Starting failure Over-under generator voltage Over-under frequency Over-under speed High-low battery voltage Overload generator Internal memory failure
Functions	Remote starting (only to AUTO) Cold start aid Automatic periodic test (only to AUTO) Generator contactor control

WEIGHT - DIMENSIONS AND ACCESSORIES

GE 10 YSX



DRY WEIGHT MACHINE:


- 535 Kg (tank version 55 lt)
- 670 Kg (tank version 350 lt)

Generating set pictured may include optional accessories.



DIMENSIONS DRAW

- 1680 x 770 x 1550 mm (tank version 350 lt)
- For version with 55 lt tank, see the illustrations as shown below.

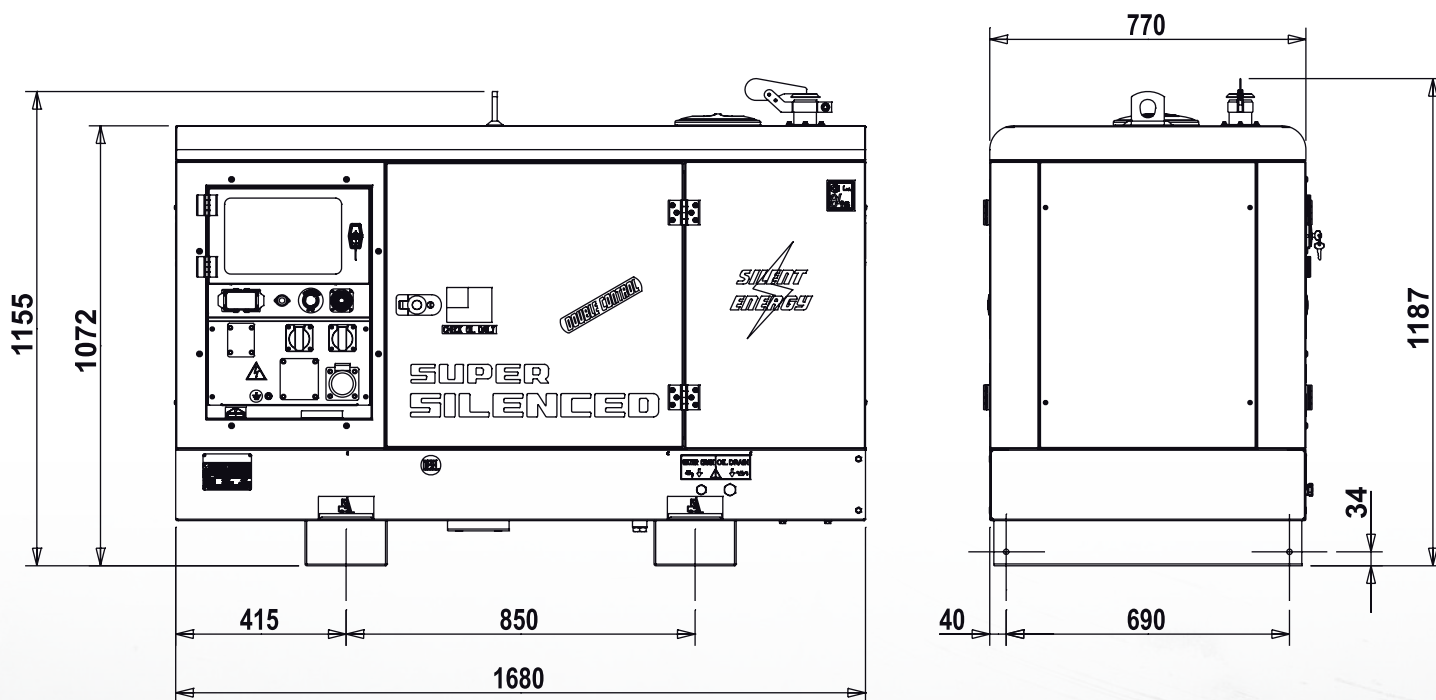

OPTIONS ON REQUEST

- Automatic transfer unit EAS 17 - 809 (25 A)
- Galvanized skid base frame
- Remote control TCM35
- Locking Fuel Cap
- Site tow CTL15
- Road trailer CTV1/O
- Road trailer CTV1/S
- Earthing kit



VERSIONS ON REQUEST

- /



FACTORY INSTALLATION OPTIONS

- Engine water heater WH
- Isometer
- Gauges - water temperature and oil pressure
- Spark arrestor
- Radio control
- 350 litre internal tank
- Main battery switch

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

2006/42 / EC (Machines Directive)
 2014/35 / EU (Low Voltage Directive)
 2014/30 / EU (EMC Directive)
 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
 ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2008 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

