

GENERATING SET GE 15 YSX

The images are for reference



FEATURES

- Combined system voltage regulation: electronic AVR + Compound
- The rounded edges of the canopy designed for rainwater drainage away
- Bunded base suitable to contain any liquids leakage from engine avoiding environmental pollution
- External caps for oil and water drain
- Large doors for better and easy maintenance (air, oil, fuel filters replacement)
- Central lifting eye
- Forklift pockets
- Supersilenced
- Ready for connection to automatic transfer unit EAS (AMF + ATS)
- Meets EC directives for noise and safety



water
cooled



diesel



three-phase
power



electric
starter



super
silenced

POWER RATINGS

* Stand-By three-phase power	15 kVA (12 kW) / 400V / 21.6 A
* PRP three-phase power	14 kVA (11.2 kW) / 400V / 20.2 A
* PRP single-phase power	6.5 kVA / 230V / 28.3A
* COP single-phase power	/
Frequency	50 Hz
cos φ	0.8

* Output powers according to ISO 8528-1

DEFINITION

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level

LTP power: stand-by power: Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

PRP power: continue power with variable loads. Maximum power for use with variable loads for a yearly illimited nubers of hours.

COP power: continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

ENGINE 1500 RPM

4 STROKE, DIRECT INJECTION, NATURAL ASPIRATED

Model	YANMAR 3TNV88
* Stand-By net power	13.6 kW (18.5 hp)
* PRP net power	12.3 kW (16.7 hp)
* COP net power	/
Cylinders / Displacement	3/ 1.6 lit.
Bore / Stroke	88 / 90 (mm)
Compression ratio	20 : 1
BMEP (Brake Mean Effective Pressure : LTP - PRP)	/
Speed governor type	Mechanical
FUEL CONSUMPTION	
110 % (Stand-by power)	3.8 lit./h
100 % to PRP	3.4 lit./h
75 % to PRP	2.6 lit./h
50 % to PRP	1.9 lit./h
COOLING SYSTEM	
Total system cap. - only engine	6 lit. - 2 lit.
Fan air flow	41 m³/min
LUBRICATION SYSTEM	
Total oil system capacity	/
Oil capacity in sump	2.8 lit. (min) - 6.7 lit. (max)
Oil consumption at full load	/

* Output powers according to ISO 3046-1

EXHAUST SYSTEM	
Maximum exhaust gas flow	/
Max. exhaust gas temp.	540 °C
Maximum back pressure	12.75 kPa (0.275 bar)
External diameter exhaust pipe	/
ELECTRICAL SYSTEM	
Starter motor power	1.2 kW
Battery charging alternator cap.	40 A
Cold start	- 15 °C
With cold start aid	/
AIR FILTER	
Combustion air flow	1.1 m³/min
HEAT REJECTED AT FULL LOAD	
To exhaust system	/
To water and oil	/
Radiated to room	/
To charge cooler	/

ALTERNATOR

SYNCHRONOUS, THREE-PHASE, SELF-EXCITED, SELF-REGULATED, BRUSHLESS	
Continuous power	16 kVA
Stand-by power	17.5 kVA
Three phase voltage	380-415 Vac
Frequency	50 Hz
Cos ϕ	0.8
Model A.V.R.	HVR-10 KE
Voltage regulation acc.	± 1.0 %
Sustained short circuit current	3 In
Transient dip (100% load)	17 %
Recovery time	/
Efficiency at 100% load	86 % (400V - Cos ϕ 0,8)
Insulation	Class H
Connection - Terminals	Star - N°6
Electromagnetic compatibility (R.F.I. suppr.)	/
Waveform distortion - THD	< 4 %
Telephone interference - THF	/

REACTANCES (16 kVA - 400V)	
Direct axis synchronous - Xd	260 %
Direct axis transient - X'd	20 %
Subdirect axis transient - X''d	7.7 %
Quadrature axis synchronous - Xq	140 %
Quadr. axis subtransient - X''q	/
Negative sequence - X2	/
Zero sequence - X0	/
TIME CONSTANTS	
Transient - T'd	0.031 sec
Subtransient - T''d	0.006 sec
Open circuit - T'do	0.402 sec
Armature - Ta	/
Short-circuit ratio Kcc	0.76
Cooling air flow	09 m³/sec.
Coupling I Bearing	Direct SAE 4 - 7 ½ - N°1

GENERAL SPECIFICATIONS

Fuel tank capacity	55 lt.
Running time (75% to PRP)	21 h
Starter battery	12 Vdc - 62Ah
IP protection degree	IP 44

* Measured acoustic power LwA (pressure LpA)	85 dB(A) (60 dB(A) @ 7m)
* Guaranteed acoustic power LwA (pressure LpA)	86 dB(A) (61 dB(A) @ 7m)
Performance class (ISO 8528)	G2

* Acoustic power according to European Directive 2000/14/CE

CONTROL PANEL

- Controller EP6
- Fuel level gauge
- Siren
- Emergency stop button
- Local-Remote Start switch
- EAS plug
- TCM 35 remote control plug
- Voltmeter switch 0 - RS - ST - TR
- Four pole circuit breaker
- ELCB-GFI (Ground Fault Interruptor) 30 mA
- Output sockets: 1x 400V 32A 3P+N+T CEE
1x 400V 16A 3P+N+T CEE
1x 230V 16A 2P+T CEE
1x 230V 16A 2P+T SCHUKO
- Circuit breakers for 230V 16A sockets
- Earth terminal (PE)

EP6 CONTROLLER CHARACTERISTICS	
Operating mode	OFF - MAN. - AUTO
Display	4-digits display
LEDs	Engine is running AUTO mode
Buttons/controls	Starter key AUTO button N° 5 buttons for controller programming
Measures	Generator voltage Generator current Frequency Engine speed Battery voltage Charger battery voltage Hoursmeter
Alarms	Low oil pressure High temperature Belt break Low level fuel Emergency stop button Starting failure Over-under generator voltage Over-under frequency Over-under speed High-low battery voltage Overload generator Internal memory failure
Functions	Remote starting (only to AUTO) Cold start aid Automatic periodic test (only to AUTO) Generator contactor control

WEIGHT - DIMENSIONS AND ACCESSORIES

GE 15 YSX



DRY WEIGHT MACHINE:



- 630 Kg (tank version 55 lt)
- 770 Kg (tank version 350 lt)

Generating set pictured may include optional accessories.



DIMENSIONS DRAW

- 1680 x 770 x 1550 mm (tank version 350 lt)
- For version with 55 lt tank, see the illustrations as shown below.

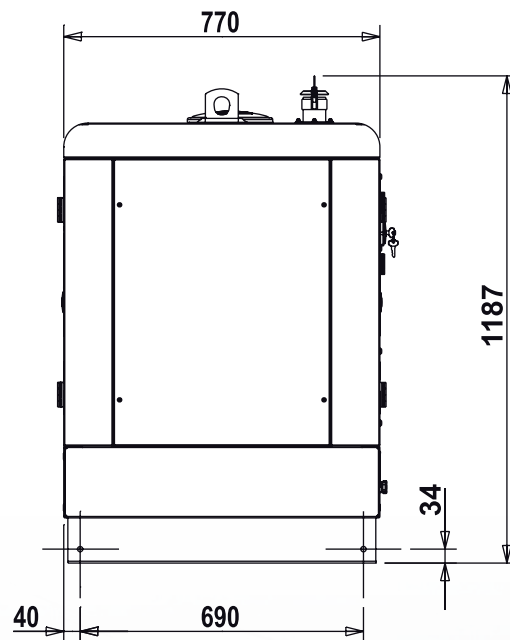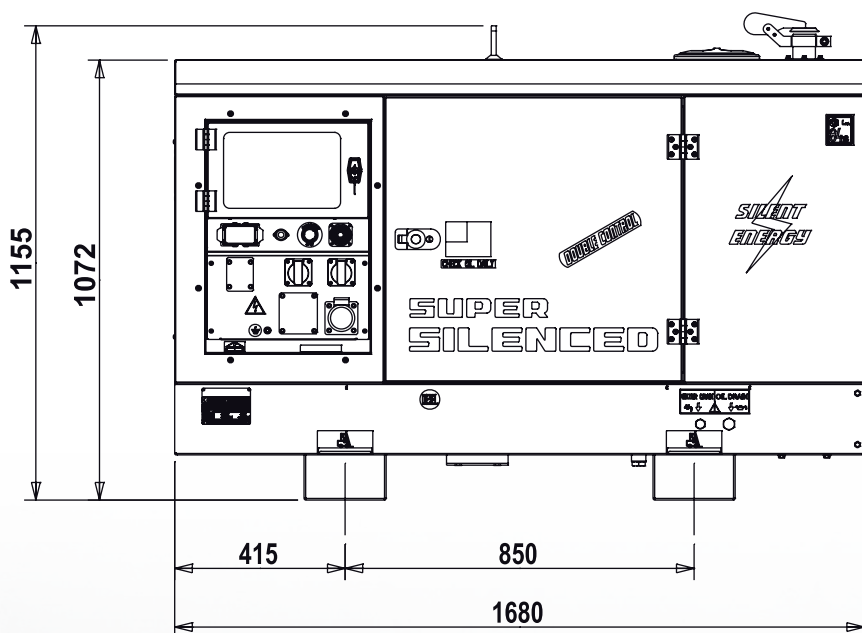

OPTIONS ON REQUEST

- Galvanized skid base frame
- Remote control TCM35
- Automatic transfer EAS 17-809
- Locking Fuel Cap
- Earthing kit
- Site tow CTL15
- Road trailer CTV1/O
- Road trailer CTV1/S



VERSIONS ON REQUEST

• /



FACTORY INSTALLATION OPTIONS

- Engine water heater WH
- Isometer
- Gauges - water temperature and oil pressure
- Spark arrestor
- Radio control
- 350 litre internal tank
- Main battery switch
- * Plug-in module with double RS232 and RS485 port
- * GSM modem with antenna
- * Internet / Ethernet plug-in module with Web Server

* Only with EAS

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machines Directive)
- 2014/35 / EU (Low Voltage Directive)
- 2014/30 / EU (EMC Directive)
- 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
- ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2008 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

