

GENERATING SET

GE 5000 KBM

The images are for reference



FEATURES

- Engine shut down for low oil level
- Heavy duty air cleaner with built-in warm-air system for winter operation
- Three fuel filters: fill neck, in-tank and carburetor inlet
- Muffler with heat shield and spark arrestor
- Overload thermal shut off
- Battery charger 12 Vcc with fuse protection
- Protective frame
- Portable
- AVR version **on request**
- Meets EC directives of safety



Air cooling



petrol



single-phase power



manual recoil

POWER RATINGS

* Stand-by single-phase power	4.9 kVA (4.4 kW) / 230V / 21.3A
* PRP single-phase power	4 kVA (3.6 kW) / 230V / 17.4A
* COP single-phase power	/
Frequency	50 Hz
Cos φ	0.9

* Output powers according to ISO 8528

DEFINITIONS

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level)

LTP stand-by power: Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

PRP power: Continue power with variable loads. Maximum power for use with variable loads for a yearly unlimited numbers of hours.

COP power: COP Power: continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

3000 RPM ENGINE

4-STROKE, OHV, NATURAL ASPIRATED

Model	KOHLER CH 395 COMMAND PRO
* Stand-By net power	/
* PRP net power	/
* COP net power	/
Cylinders/ Displacement	1 / 277 cm ³ (0.277 lt.)
Bore / Stroke	78 / 58 (mm)
Compression ratio	8,8: 1
BMEP (Brake Mean Effective Pressure : LTP - PRP)	/
Speed governor type	Mechanical
FUEL CONSUMPTION	
110 % (Stand-By power)	/
100 % of PRP	/
75 % of PRP	/
50 % of PRP	/
COOLING SYSTEM	
Total system cap. - only engine	/
Fan air flow	/
LUBRIFICATION SYSTEM	
Total oil system capacity	/
Oil capacity in sump	1.3 lt.
Oil consumption at full load	/

* Output powers according to ISO 3046-1

EXHAUST SYSTEM

Maximum exhaust gas flow	/
Max. exhaust gas temp.	/
Maximum back pressure	/
External diameter exhaust pipe	/
ELECTRICAL SYSTEM	
Starter motor power	/
Battery charging alternator cap.	/
Cold star	/
Cold start aids	/
AIR FILTER	Dry
Combustion air flow	/
HEAT REJECTED AT FULL LOAD	
To exhaust system	/
To water and oil	/
Radiated to room	/
To charge cooler	/

ALTERNATOR

SYNCHRONOUS, SINGLE-PHASE, SELF-EXCITED, SELF-REGULATED, BRUSHLESS		
	WITHOUT AVR	WITH AVR
Continuous power	4.2 kVA	4.5 kVA
Stand-By power	4.6 kVA	5 kVA
Single phase voltage	230 Vac	
Frequency	50 Hz	
Cos ϕ	1	
Model A.V.R.	/	HVR10E
Voltage regulation acc	$\pm 5 \%$	$\pm 1 \%$
Sustained short circuit current	3 In	
Transient dip (100% load)	$< 15 \%$	10 %
Recovery time	/	
Efficiency at 100% load	75% (230V - Cos ϕ 1)	76% (230V - Cos ϕ 1)
Insulation	Class H	
Connection - Terminals	Series - N°2	
Electromagnetic compatibility (R.F.I. suppr.)	EN55011	
Waveform distortion - THD	$< 6 \%$	$< 5.5 \%$
Telephone interference - THF	/	

REACTANCES (4.2 kVA - 230 V)	
REACTANCES AVR (4.5 kVA - 230 V)	
Direct axis synchronous - Xd	/
Direct axis transient - X'd	/
Direct axis subtransient - X''d	/
Quadrature axis synchronous - Xq	/
Quadr. axis subtransient - X''q	/
Negative sequence - X2	/
Zero sequence - X0	/
TIME CONSTANTS	
Transient - T'd	/
Subtransient - T''d	/
Open circuit - T'do	/
Armature - Ta	/
Short-circuit ratio Kcc	/
IP protection degree	IP 23
Cooling air flow	0.062/ m ³ /sec
Coupling - Bearing	Direct J609b - N°1

GENERAL SPECIFICATION

Tank capacity	7 lt.
Running time (75% of PRP)	/
Start battery	/
IP protection degree	IP 23

Acoustic power Lwa (pressure LpA)	99 dB(A) (74 dB(A) @ 7m)
Performance class	G2

CONTROL PANEL

- Engine switch ON- OFF
- Choke
- Thermal circuit breaker for 230V/16A sockets :1 x 18A
- Earth terminal (PE)
- Output terminals for 12 Vdc (battery charger)
- Fuse for 12Vdc output :1 x 10A

AVAILABLE SOCKET COMBINATIONS

	VERSIONS		
	STANDARD	AVR	SCHUKO
1x230V 16A 2P+T CEE	•		
1x230V 16A 2P+T Schuko	•		
2x230V 16A 2P+T Schuko		•	•

WEIGHT - DIMENSIONS AND ACCESSORIES

GE 5000 KBM




DRY WEIGHT OF MACHINE:

- 60 kg

Generating set pictured may include optional accessories.



DIMENSIONS PICTURE

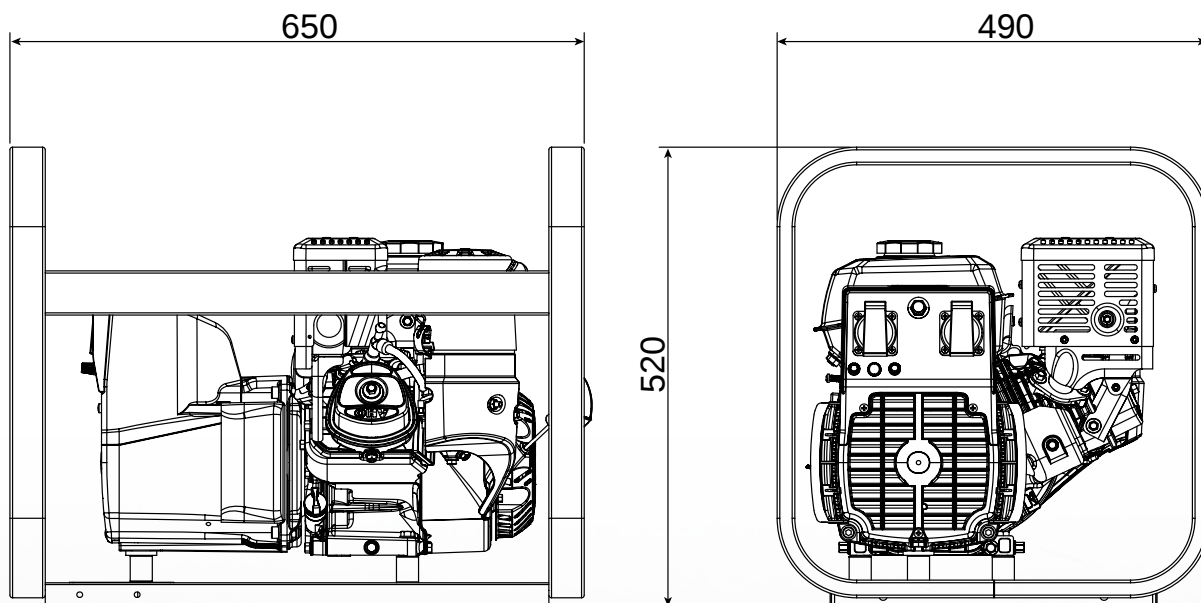

OPTIONS ON REQUEST

- Earthing kit
- Moving trolley CM8



VERSIONS ON REQUEST

- Schuko sockets version
- AVR version



FACTORY INSTALLATION OPTIONS

- /

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machines Directive)
- 2014/35 / EU (Low Voltage Directive)
- 2014/30 / EU (EMC Directive)
- 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
- ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2015 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

